

# DATA SHEET

## RUBBER FEET



Our BlocFoot® range provides a reliable and adaptable support solution for pipework and cable trays. They are equally well-suited for use with air conditioning outdoor units and air source heat pump installations.


### PRODUCT INFORMATION

Each foot features a 41mm x 21mm bonded channel, recessed into the top of the BlocFoot®. Also Using a new T-bar bonding method, the channel is securely fixed in place, making it one of the most reliable bonded channels available on the market. The channel design allows for the use of standard channel fixings, ensuring your services can be easily and securely mounted.

### KEY FEATURES:

- 01.** Suitable for working temperatures between -40°C to +80°C. BSEN60068-2-14
- 02.** New T bar design on the channel creates an even stronger bond between the rubber and the channel
- 03.** 41mm x 21mm Bonded Aluminium Channel compatible with strut fixings
- 04.** Made from recycled SBR rubber

Part No	Length (mm)	Width (mm)	Height (mm)	Max Load (KG)
BF250	250	185	98	160
BF400	400	185	98	240
BF600	600	185	98	450
BF1000	1000	185	98	645

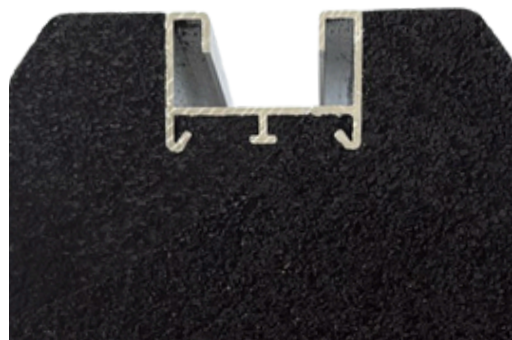

**NEW T BAR DESIGN TO  
CREATE A STRONGER BOND**

BlocFoot® is exclusively distributed in the UK by NCM DISTRIBUTORS LTD, Unit 5 Planet Centre, Feltham, TW14 0AL. All information in this document is correct at the time of release but subject to change.

**CONTACT US:**



020 32692072



sales@blocfoot.com